


COMBI ALL BLACK

ideal for high performance UV coating as inert coating or hot coating. In the wood industry for sanding MDF (before laminating process) with wide and narrow belt sanding machines or edge sanders, combines a longer lifespan with excellent finishing results for laminating with the thinnest sheets.

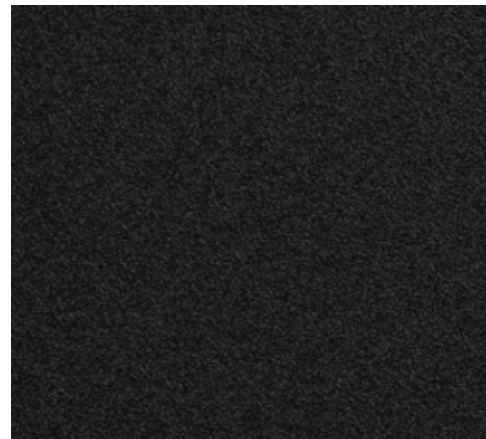

TECHNICAL DETAILS

BACKING	COMBINED BACKING	COATING	SEMI-OPEN
GRAIN	SILICON CARBIDE	STEARATE	YES
BONDING	DOUBLE RESIN	GRIT	P80-P600
WIDTH	1650 mm	COLOR	BLACK

AVAILABLE FORMATS



PRODUCTIVE SECTOR



WORKING PROCESSES

